

ACCESORIOS DE BRIDAS

FLANGED JOINT / JOINT BRIDES

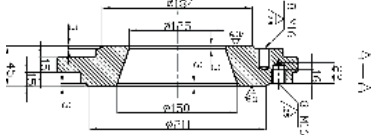


DN 60 a DN 300

De acuerdo a la normativa EN545

Presiones de trabajo: PN10, PN16 y PN25

Recubrimiento: Epoxy azul
(posibilidad Epoxy rojo bajo pedido)

BRIDA REDUCTORA REDUCING FLANGE BRIDE DE REDUCTION		
	DN	Bolts / Tornillos
	60/40	5
	60/50	5,3
	65/50	5,6
	80/40	5
	80/50	5,7
	80/65	4,9
	100/40	5
	100/50	5,4
	100/65	5,8
	100/80	8,7
	125/65	6,7
	125/80	7,5
	125/100	8,9
	150/65	9,1
	150/80	9
	150/100	11,1
	200/65	13,5
	200/80	13,3
	200/100	13,2
	200/125	14,5
	200/150	15
	250/150	16,9
	250/200	24,2
	300/80	26,5
	300/100	27
	300/150	25,3
	300/200	24,1
	300/250	31,2

Tornillos en acero zincado

Dimensiones en mm.
Dimensions in mm.
Dimensions en mm.

Bridas orientables hasta DN. 600 mm.
Loosing flanges up to DN. 600 mm.
Brides orientables jusqu'au DN. 600 mm.

≥ DN 700 in mechanical joint
≥ DN 700 en joint mécanique